

## SUPRAFLEX, the sanding specialist for painted surfaces, wood, stone and metal

### SE 14-2 150 Set

Order number 419.206



#### Technical attributes

Max. back-up pad diameter	150 mm
No load speed	600-2100 rpm
Power input	1400 watt
Power output	880 watt
Tool fixture	M 14
Cable length	4,0 m
Size (W x L x H)	405 x 200 x 120 mm
Weight	2,6 kg

#### Standard equipment

1 guard SG D150 SE	419.176
1 auxiliary handle SE 14-2 125 M8	391.581
1 velcro sanding pad SP D150-8/6 H/F	419.192
4 sheets of sandingpaper Ø 150 mm	1 set
1 offset face spanner	398.365
1 hexagon socket wrench, SW 4	102.229
1 hexagon socket wrench, SW 5 long	392.731
3 cable clips	252.188 (3x)
1 carrying case L-BOXX® 238	414.093
1 case insert	414.158

### SUPRAFLEX, the sanding specialist for painted surfaces, wood, stone and metal

- + VR electronic control: stepless speed selection, tachogenerator-controlled constant speed, overload protection, re-start protection and temperature monitoring
- + Powerful 1400 watt motor with highly-efficient ventilator for optimum cooling
- + Optimised air flow for optimum cooling of motor and gear. No annoying exhaust air for the user
- + Innovative combination of planetary and angular gears reduces noise to an absolute minimum
- + Flat gear head reduces distance to the surface. The machine can therefore be operated safely in any position.
- + Grip hood: ergonomically shaped with SoftGrip. The machine can be controlled with precision and is always comfortable yet secure to hold.
- + Completely cast electronic components prevents damage due to metal dust. Protective guard on the winding end of the armature and plated winding on the armature. The 3-fold winding protection reduces motor wear, increases service life.
- + Epoxy-coated winding on the field coil
- + Guard with pivoting edge segment
- + Genuine operation thanks to conveniently placed and dust-protected on/off switch
- + 4 metres PUR H07-BQF cable: wear-resistant, flexible and highly resistant to cuts and abrasions
- + Spindle lock
- + Sanding specialist for refurbishing, renovating, modernising, processing stainless steel, metal, natural/artificial stone, wood surfaces, painted surfaces

## Accessories

### Extraction hood with pivoting edge segment

Order number 419.176




#### Technical attributes

Dimensions in mm	150 Ø
QTY/PKG	1

For optimal dust extraction without adapter. Enables you to work near edges at maximum extraction power. Tool-free height adjustment via clamping lever allows quick adjustment of the extraction hood to the tool height.

### Velcro backing pad

Order number 419.192

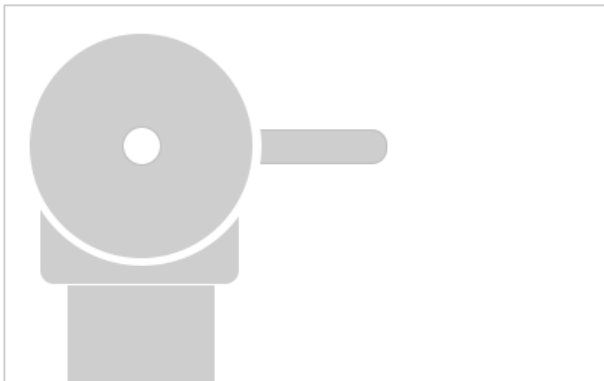

#### Technical attributes

Dimensions in mm	150 Ø
QTY/PKG	1

With 6 + 8-hole system for optimum dust extraction for all FLEX velcro sanding tools Ø 150 mm. The 3 mm cellular rubber damping reduces the shearing forces between support pad and sanding tool. Thanks to long velcro hooks, there is greater temperature resistance at a high load.

## Accessories

### Clamping flange

Order number 393.371



For use with flap sanding discs  $\varnothing$  125 mm.

#### Technical attributes

QTY/PKG	1
---------	---

### Clamping nut M 14

Order number 100.080



For use with flap sanding discs  $\varnothing$  125 mm.

#### Technical attributes

QTY/PKG	1
---------	---

### Side handgrip

Order number 391.581



Side handle, thread M 8.

#### Technical attributes

QTY/PKG	1
---------	---

## Accessories

### Diamond sanding pad

Order number 418.951




#### Technical attributes

Dimensions in mm	150 Ø
Grit	30
QTY/PKG	1

For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.

### Diamond sanding pad

Order number 418.978

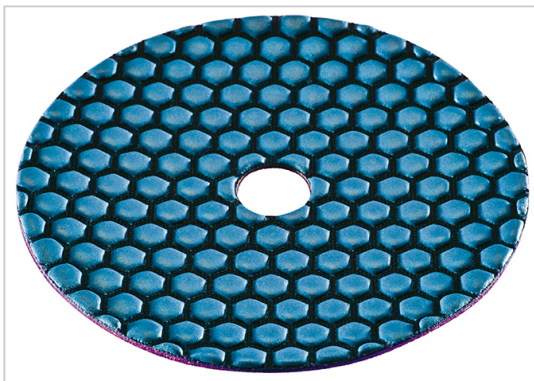

#### Technical attributes


Dimensions in mm	150 Ø
Grit	50
QTY/PKG	1

For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.

## Accessories

### Diamond sanding pad

Order number 418.986

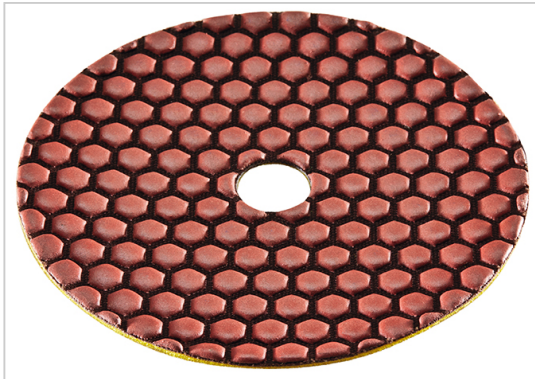


#### Technical attributes

Dimensions in mm	150 Ø
Grit	100
QTY/PKG	1

For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.

### Diamond sanding pad

Order number 418.994

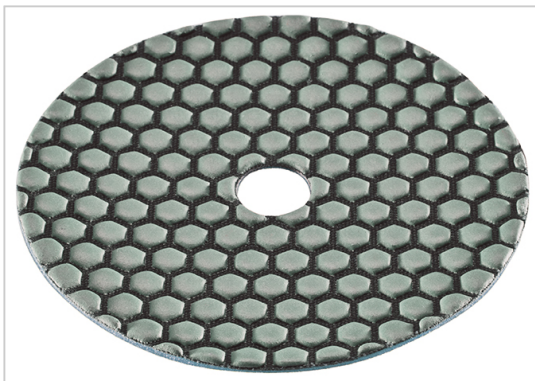

#### Technical attributes


Dimensions in mm	150 Ø
Grit	200
QTY/PKG	1

For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.

## Accessories

### Diamond sanding pad

Order number 419.001

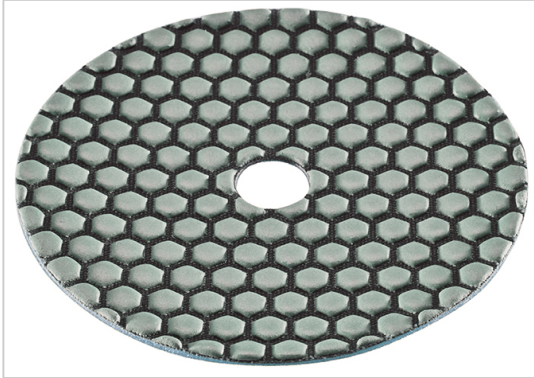

Technical attributes	
Dimensions in mm	150 Ø
Grit	400
QTY/PKG	1

For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.

### Diamond sanding pad

Order number 419.028



Technical attributes	
Dimensions in mm	150 Ø
Grit	800
QTY/PKG	1


For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.



## Accessories

### Diamond sanding pad

Order number 419.036

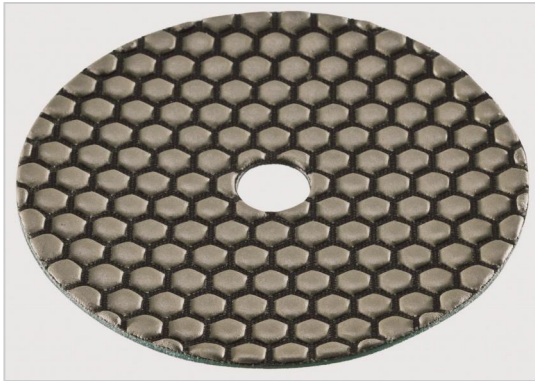

Technical attributes	
Dimensions in mm	150 Ø
Grit	1500
QTY/PKG	1

For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.

### Diamond sanding pad

Order number 419.044



Technical attributes	
Dimensions in mm	150 Ø
Grit	3000
QTY/PKG	1

For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.

## Accessories

### Diamond sanding pad


Order number 419.052



Technical attributes	
Dimensions in mm	150 Ø
Grit	10000
QTY/PKG	1

For use with velcro sanding disc 150 Ø. Sanding pads for dry sanding, a great advantage in the repair and renovation areas. Suitable for sanding and polishing granite worktops, fine stoneware tiles, floor tiles, concrete surfaces in the field of vision, natural stone on windowsills, cover panels, sculptures, steps.

### Velcro sanding paper SELECTFLEX

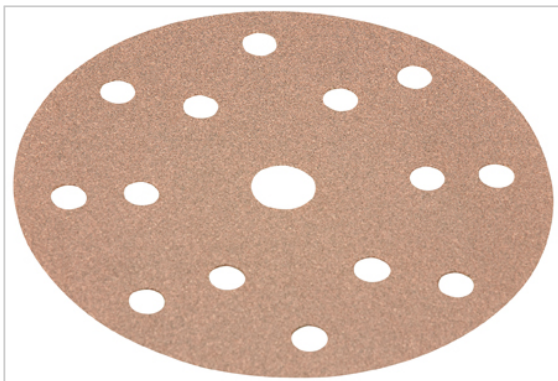


Technical attributes			
Dimensions in mm	Grit	QTY/PKG	Order number
150 Ø	P 40	50	408.085
150 Ø	P 60	50	408.166
150 Ø	P 80	50	408.174
150 Ø	P 100	50	408.182
150 Ø	P 120	50	408.190
150 Ø	P 150	50	408.204
150 Ø	P 180	50	408.212
150 Ø	P 220	50	408.220
150 Ø	P 320	50	408.239
150 Ø	P 400	50	408.247

Ideally suited for redevelopment, renovation and modernisation, especially for working paints, varnishes, stopping, filler.



## Accessories

### Velcro sanding paper PURFLEX

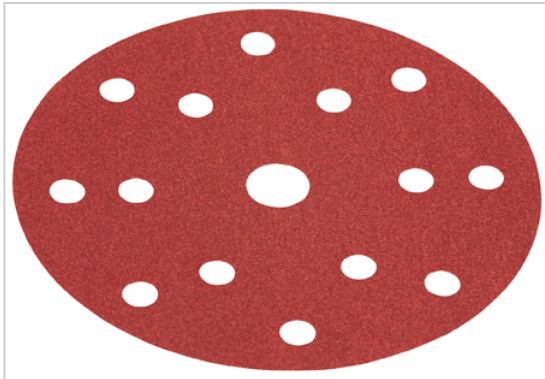

Ideally suited for working wood and metal.

#### Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
150 Ø	P 40	50	408.018
150 Ø	P 80	50	408.034
150 Ø	P 100	50	408.042
150 Ø	P 120	50	408.050
150 Ø	P 150	50	408.069
150 Ø	P 180	50	408.077

### Velcro sanding fleece MESHFLEX



Ideally suited for roughing, cleaning, degreasing, matt finishing on all materials.

#### Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
150 Ø	A 100	5	408.255
150 Ø	A 280	5	408.263
150 Ø	S 1500	5	408.271

### Paint Set (Ø 150 mm)

**Order number 408.468**



#### Technical attributes

QTY/PKG	1
---------	---

Sanding-Set for processing painted surfaces for random-orbit sander with D150. Consisting of: 1 carrying case L-BOXX® 136, 1 case insert

FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

accessory TKE 4xD150, 5 sheets of Velcro sandpaper PURFLEX P 60, P 80, P 100, P 120, P 150, 5 sheets of Velcro sandpaper SELECTFLEX P 60, P 80, P 100, P 120, P 320, 1 sheet of Velcro sandpaper MESHFLEX A 100, A 280.

## Carrying case L-BOXX®

Order number 414.093




### Technical attributes

External dimensions L x W x H	442 x 357 x 253 mm
Internal dimensions L x W x H	378 x 306 x 209 mm
Weight	2,8 kg
QTY/PKG	1

The robust storage and transport system L-BOXX® made of impact-resistant plastic conveys tools, accessories and consumables easily and comfortably to the place of use. Elaborate inserts provide order and clarity, ergonomically shaped handles and additional moulded recesses for flexible and comfortable handling. The unbeatably simple connection and disconnection of the different L-BOXXes optimises combined transportation. Fits the TÜV-tested in-vehicle equipment system from Sortimo perfectly and without adapters. Load capacity per L-BOXX® up to 25 kg, combined transportation up to 40 kg, the cover can be loaded up to 100 kg. Splash-proof. Without insert.

## Case insert

Order number 414.158

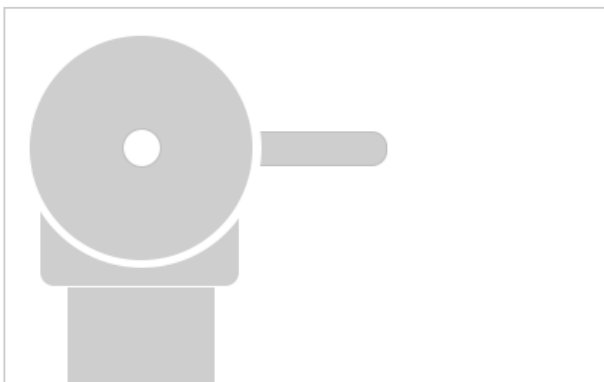

### Technical attributes

QTY/PKG	1
---------	---

Suitable insert for carrying case L-BOXX® 238. For the SUPRAFLEX SE 14-2 125/150.

## Accessories

### Trolley L-BOXX®

Order number 419.400



Technical attributes	
Dimensions in mm	646 x 492 x 182
Weight	3,8 kg
QTY/PKG	1

Trolley for the L-BOXX®es made of plastic with 4 castors, two of which can be locked. Can be loaded up to 100 kg.

### Grid foam insert L-BOXX®

Order number 419.370



Technical attributes	
QTY/PKG	1

Grid foam insert for the L-BOXX® type 136. The perforated foam allows the foam insert to be individually adjusted to the contents.

### Antistatic suction hose with auxiliary air control

Order number 406.708



Technical attributes	
QTY/PKG	1

Internal Ø 32 mm, 4 m with universal device connection, snap connection and universal adapter (445.029), antistatic. Includes variable


FLEX-Elektrowerkzeuge GmbH  
Bahnhofstraße 15  
71711 Steinheim  
Phone +49 7144 828-0  
Fax +49 7144 25899  
info@flex-tools.com  
www.flex-tools.com

# FLEX

adjustment of suction power for reduction of vacuum.

## Anti slip insert L-BOXX®

Order number 419.389

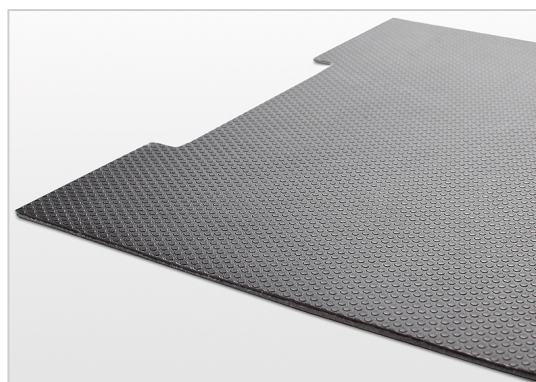

### Technical attributes

Size (W x L x H)	378 x 306 x 3 mm
QTY/PKG	1

Soft insert mat made of rubber suitable for the L-BOXX® type 238. Protects the boxx and the material on the floor from damage during transportation.